


## Ordering Information

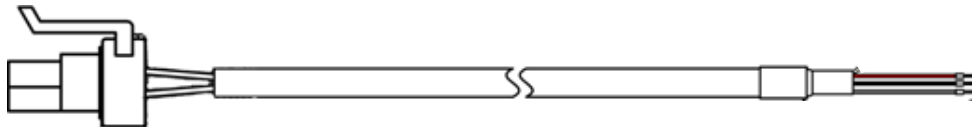

Please refer to page 57 for connector diagram.  
 Not all connectors are offered on page 57 are available as a harness.  
 See ordering code below.

Series	Number of Pins Available
CFPS2	3
FLDP	2, 3, 4
FLDR	2, 3, 4
FLWF	2, 3
FLWM	2, 3
FLCM	2, 3
FLCF	2,3
FLPM	2, 3
FLPF	2, 3

### 1 - Connector Type:

Series	Description
<b>CFPS2</b>	- Metripack 150 P2S Series
<b>FLDP</b>	- Deutsch DT Series Plug
<b>FLDR</b>	- Deutsch DT Series Receptacle
<b>FLWF</b>	- Weather Pack Female (Tower)
<b>FLWM</b>	- Weather Pack Male (Shroud)
<b>FLCM</b>	- Metripack 150 Series Male
<b>FLCF</b>	- Metripack 150 Series Female
<b>FLPM</b>	- Metripack 280 Series Male
<b>FLPF</b>	- Metripack 280 Series Female

### 2 - Number of Pins:

- 2 - Select Number of Pins required.
- 3 - Please see above details for number of pins offered for the connector series.
- 4

### 3 - Wire or Cable Length:

- 18FL** - 18" Flying Lead, 18 AWG, PVC, 600V, UL1015
- 79FL** - 79" Flying Lead, 18 AWG, PVC, 600V, UL1015
- 120FL** - 120" Flying Lead, 18 AWG, PVC, 600V, UL1015
- C39** - 39" Cable, 20 AWG, PVC, Jacketed with braid/foil shielded
- C79** - 79" Cable, 20 AWG, PVC, Jacketed with braid/foil shielded
- C118** - 118" Cable, 20 AWG, PVC, Jacketed with braid/foil shielded
- C196** - 196" Cable, 20 AWG, PVC, Jacketed with braid/foil shielded

### 4 - Options: (Optional, blank if standard)

- Blank** - No Options required
- HS** - Heat Shrink (For flying lead configuration only)
- SL** - Split Flex (For flying lead configuration only)

<b>FLDR</b> - Deutsch DT04-2P (Receptacle, 2 Tower) Only available for SPST	<b>FLDP</b> - Deutsch DT06-2S (Plug, 2 Tower) Only available for SPST	<b>FLDR</b> - Deutsch DT04-3P (Receptacle, 3 Tower) Only available for SPDT	<b>FLDP</b> - Deutsch DT06-3S (Plug, 3 Tower) Only available for SPDT
<b>FLWF</b> - Weather Pack (Female, 2 Tower) Only available for SPST	<b>FLWM</b> - Weather Pack (Male, 2 Shroud) Only available for SPST	<b>FLWF</b> - Weather Pack (Female, 3 Tower) Only available for SPDT	<b>FLWM</b> - Weather Pack (Male, 3 Shroud) Only available for SPDT
<b>FLCF</b> - Metripack 150 Series (Female ) Only available for SPST	<b>FLCM</b> - Metripack 150 Series (Male) Only available for SPST	<b>FLCF</b> - Metripack 150 Series (Female) Only available for SPDT	<b>FLCM</b> - Metripack 150 Series (Male) Only available for SPDT
<b>FLPF</b> - Metripack 280 Series (Female) Only available for SPST	<b>FLPM</b> - Metripack 280 Series (Male) Only available for SPST	<b>FLPF</b> - Metripack 280 Series (Female) Only available for SPDT	<b>FLPM</b> - Metripack 280 Series (Male) Only available for SPDT
<b>HC</b> DIN 43650 Form A Only available for SPDT	<b>HN</b> DIN 43650A 1/2" Conduit Only available for SPDT	<b>FL</b> Flying Leads	<b>SP</b> 1/4" Spade Terminals
<b>-30</b> SKBA BOOT	<b>-30</b> BOOT - FOR SPAL, SPFL, SPFLH, SPVL, SPVF		