

## VE



## DESCRIPTION

The VE series is a sight gauge level switch that can be installed on the side of a reservoir. It enables an operator to visually identify the liquid level and to generate an electrical signal for low or high level fluid detection. This easy to install switch is affordable and reliable. It is available in two different lengths.


## **FEATURES**

- Compact size
- Easy to install
- Visual indicator

## **APPLICATIONS**

- Water tank
- Hydraulic units
- Level monitoring

Specifications				Wiring Code		
Electrical	1A, 20W, 20	1A, 20W, 20 VA. 150 VDC/VAC		CONTACT	DIN 40050	
Electrical Connection	DIN 43650 F	DIN 43650 Form C, 9.4mm		COMMON	PIN 3	
Protection	IP65	IP65		NORMALLY CLOSED	PIN 2	
Temperature Range	-4°F to 158°	-4°F to 158°F (-20°C to 70°C)		NORMALLY OPEN	PIN 1	
Tube Material	Methacrylate	Methacrylate Tube		- Reference to presence of fluid		
Mounting Method	M12 Screws	M12 Screws		·····		
Seal Material	Standard Ori	Standard Oring: Nitrile Optional: Viton				
Maximum Overpressure	72.5 PSI (5 I	3AR)				
Weight	0.5 lbs (0.25	kg)				

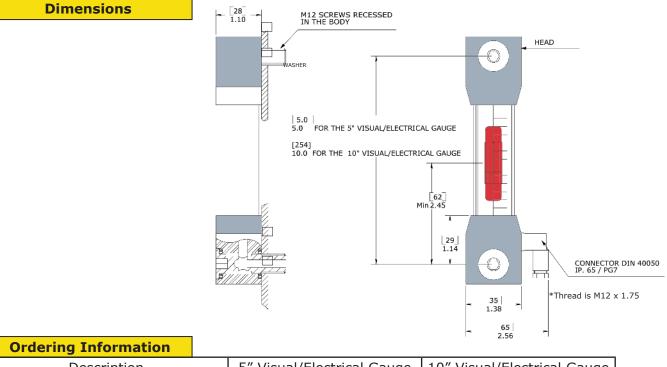

Description	5" Visual/Electrical Gauge	10" Visual/Electrical Gauge	
Single Pole Double Throw	VE-127-M12-SPDT	VE-254-M12-SPDT	
Single Pole Double Throw with Temperature Probe	VE-127-M12-SPDT-T	VE-254-M12-SPDT-T	